


TWO-CYLINDER PIPE PALLET FORK GRAPPLE




Features

- The name says it all — independent clamp arms on a pallet fork ideal for moving pipe.
- Clamp arms open to near vertical for handling palletted material.
- Corrosion, dent and flake resistant NitroSteel® cylinder rods made in the USA.
- 54" wide frame keeps long material stable.
- Standard ITA Class II forged tines.
- Machine specific hydraulic package to completely protect hose routing.



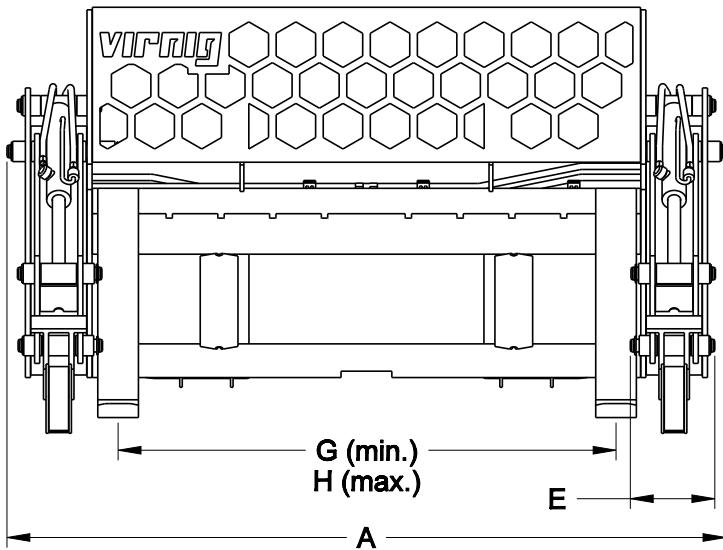

MODEL	PPFG248	PPFG260
(A) Overall Width (Inches)	70.8	
(B) Overall Depth (Inches)	56.0	67.5
(C) Overall Height, Closed (Inches)	40.4	
(D) Overall Height, Open (Inches)	81.4	
(E) Grapple Arm Width (Inches)	8.3	
(F) Grapple Arm Depth (Inches)	48.6	
(G) Minimum Tine Space (Inches)	8.9	
(H) Maximum Tine Space (Inches)	49.1	
Tine Length (Inches)	48.0	60.0
Tine Width (Inches)	4.0	
Tine Thickness (Inches)	1.75	1.5
Lift Capacity (Pounds)	6200	5500
Approximate Weight (Pounds)	950	965
Recommended Loader Capacity	Greater than 1500 pounds	

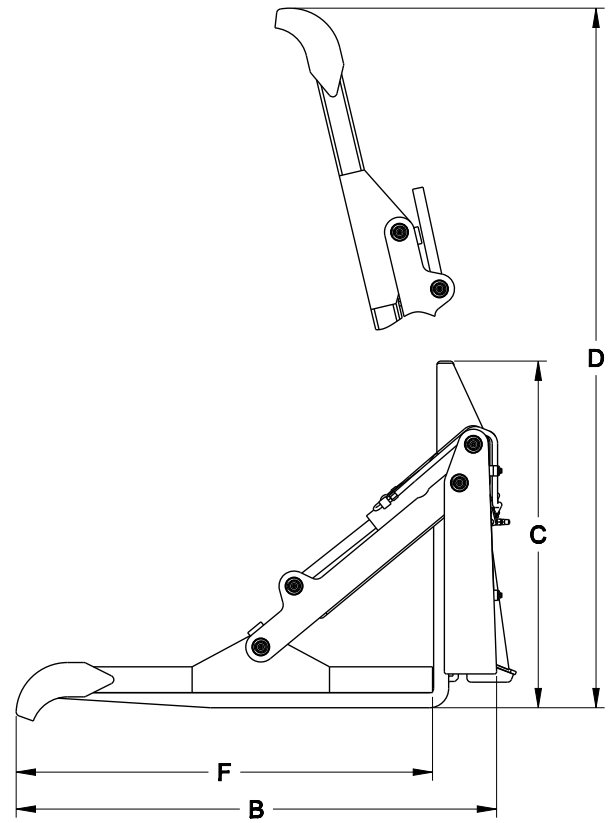

- 1-1/4" diameter hinge pins.
- 2" bore, 8-3/8" stroke cylinders with 1-1/4" NitroSteel® cylinder rods and 1-1/4" cylinder pins.
- Hoses from grapple to loader and couplers included.